


MANAC HB123 PILE

MANAC
HB123PILE

標準構造図

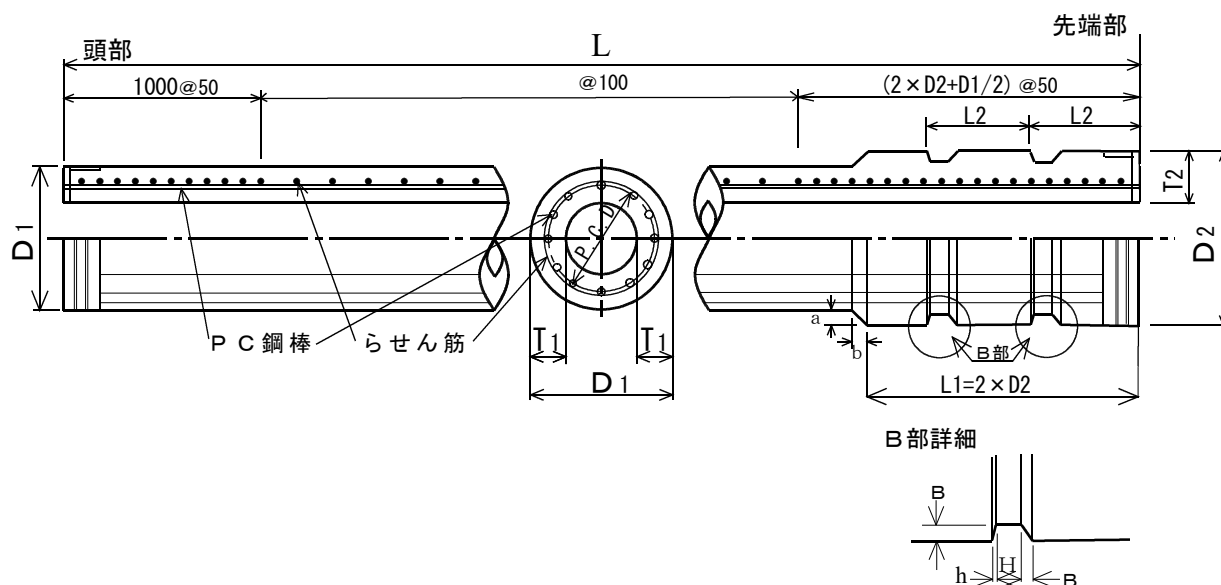

マナックHBパイル標準規格表

呼び名	本体部 外 径 D1 (mm)	拡張部 外 径 D2 (mm)	種 類	厚 さ		拡張部 長 さ L1 (mm)	テーパ 部		杭長 (m)	溝 部			
				T1 (mm)	T2 (mm)		a (mm)	b (mm)		B (mm)	H (mm)	h (mm)	L2 (mm)
3035	300	350	A	60	85	700	25	100	5~13	15	55	3	250
			B						5~15				
			C						5~13				
3540	350	400	A	60	85	800	25	100	5~13	20	65	4	300
			B						5~15				
			C						5~13				
4050	400	500	A	65	115	1000	50	100	5~15	25	80	5	370
			B						5~15				
			C						5~15				
4555	450	550	A	70	120	1100	50	100	5~15	25	90	5	400
			B						5~15				
			C						5~15				
5060	500	600	A	80	130	1200	50	100	5~15	30	95	6	450
			B						5~15				
			C						5~15				
6070	600	700	A	90	140	1400	50	100	5~15	30	110	6	500
			B						5~15				
			C						5~15				
7080	700	800	A	100	150	1600	50	100	5~15	35	130	7	600
			B						5~15				
			C						5~15				
8095	800	950	A	110	185	1900	75	150	5~15	45	150	9	700
			B						5~15				
			C						5~15				
80100	800	1000	A	110	210	2000	100	200	5~15	45	160	9	750
			B						5~15				
			C						5~15				
90100	900	1000	A	120	170	2000	50	100	5~15	45	160	9	750
			B						5~15				
			C						5~15				
90110	900	1100	A	120	220	2200	100	200	5~15	50	175	10	800
			B						5~15				
			C						5~15				
100120	1000	1200	A	130	230	2400	100	200	5~15	55	190	10	900
			B						5~15				
			C						5~15				



MANAC HB123 PILE

MANAC
HB123PILE

本体部継手金具標準寸法表 (単位: mm)

名 称	本体部 外 径 D_1	拡張部 外 径 D_2	種 類	板 厚	開 先 部		スカー ト 部	
				t_1	a	b	幅 H	厚さ t_2
3035	300	350	A	12.0	8.0	3.6	100	1.6
			B	16.0				
			C	19.0				
3540	350	400	A	12.0	8.5	3.8	100	1.6
			B	16.0				
			C	19.0				
4050	400	500	A	12.0	9.5	4.0	100	1.6
			B	16.0				
			C	19.0				
4555	450	550	A	12.0	10.0	4.2	150	1.6
			B	16.0				
			C	19.0				
5060	500	600	A	12.0	11.0	4.4	150	1.6
			B	16.0				
			C	19.0				
6070	600	700	A	14.0	12.0	4.7	150	1.6
			B	16.0				
			C	19.0				
7080	700	800	A	19.0	13.0	4.9	200	2.3
			B	19.0				
			C	22.0				
8095	800	950	A	19.0	14.0	5.2	200	2.3
			B	19.0				
			C	22.0				
80100	800	1000	A	19.0	14.0	5.2	200	2.3
			B	19.0				
			C	22.0				
90100	900	1000	A	19.0	15.0	5.5	250	3.2
			B	19.0				
			C	22.0				
90110	900	1100	A	19.0	15.0	5.5	300	3.2
			B	19.0				
			C	22.0				
100120	1000	1200	A	19.0	16.0	5.8	300	3.2
			B	19.0				
			C	22.0				

溶接金具標準構造図

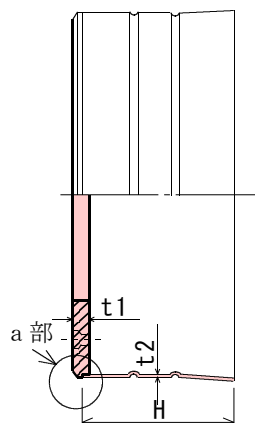

MANAC HB123 PILE

MANAC
HB123PILE

許容応力度

種類	有効フレストレス (N/mm ²)	コンクリートの設計 基準強度 (N/mm ²)	長期 (N/mm ²)			短期 (N/mm ²)		
			圧縮	曲げ引張	斜め引張	圧縮	曲げ引張	斜め引張
A	4	123	35	1.0	1.2	70	2.0	1.8
B	8	123	35	2.0	1.2	70	4.0	1.8
C	10	123	35	2.5	1.2	70	5.0	1.8

設計用基礎数値

コンクリート	設計基準強度 σ_{cu}	123N/mm ²	曲げ引張強度 σ_{tu}	7.5N/mm ²	ヤング係数 E_c	4.0×10^4 N/mm ²
PC鋼棒	規格	JIS G 3137 SBPDL 1275/1420				
	引張強度 σ_{pu}	1420N/mm ²	降伏点応力度 σ_{py}	1275N/mm ²	ヤング係数 E_p	2.0×10^5 N/mm ²

本体部標準性能表

名 称	外 径	厚 さ	外 径	厚 さ	長 さ	断面積	種 類	P C 鋼 棒			換 算 断 面 積 Ae (cm ²)	換 算 断 面 二次耐力 Ie ×10 ⁶ (mm ⁴)	曲 げ 耐 力		せん 断 ひび割れ Qcr (kN)
	D ₁	T ₁	D ₂	T ₂	L	A ₀		径 φ (mm)	本 数 n (本)	断 面 積 A p (cm ²)			曲げひび割れ Mcr (kN・m)	終局曲げ Mu (kN・m)	
	(mm)	(mm)	(mm)	(mm)	(m)	(cm ²)		(mm)	(本)	(cm ²)			(kN・m)	(kN・m)	
3035	300	60	350	85	5~13	452	A	7.1	6	2.40	462	353	27.1	43.9	101.7
					5~15		B	10.0	6	4.71	471	360	37.2	78.2	128.0
					C		11.2	6	6.00	476	363	41.7	94.4	137.9	
3540	350	60	400	5~13	547	A	7.1	8	3.20	559	613	40.3	68.5	121.1	
				5~15		B	10.0	8	6.28	572	626	55.5	122.6	152.9	
				C		11.2	8	8.00	579	633	63.3	148.3	166.6		
4050	400	65	500	115	684	A	7.1	10	4.00	700	1,018	58.6	98.4	151.0	
						B	10.0	10	7.85	715	1,040	80.6	176.9	190.6	
						C	11.2	10	10.00	724	1,052	92.1	214.4	207.8	
4555	450	70	550	120	836	A	7.1	12	4.80	855	1,594	81.5	133.6	184.5	
						B	10.0	12	9.42	873	1,628	112.2	241.4	232.1	
						C	11.2	12	12.00	884	1,646	128.1	293.3	253.0	
5060	500	80	600	130	1,056	A	7.1	14	5.60	1,078	2,464	113.4	174.6	232.7	
						B	10.0	14	10.99	1,100	2,514	155.9	317.3	293.8	
						C	11.2	14	14.00	1,112	2,541	175.9	387.3	317.1	
6070	600	90	700	140	1,442	A	7.1	19	7.60	1,472	4,937	189.3	286.0	317.3	
						B	10.0	19	14.92	1,502	5,036	260.2	522.0	399.2	
						C	11.2	19	19.00	1,518	5,091	291.9	639.1	430.9	
7080	700	100	800	150	1,885	A	10.0	13	10.21	1,926	8,902	292.5	448.2	414.1	
						B	10.0	26	20.41	1,967	9,085	402.4	830.4	521.7	
						C	11.2	26	26.00	1,989	9,186	459.3	1015.7	569.0	
8095	800	110	950	185	2,384	A	10.0	17	13.35	2,438	14,878	427.8	670.3	523.8	
						B	10.0	34	26.69	2,491	15,205	589.2	1244.4	660.1	
						C	11.2	34	34.00	2,520	15,384	673.1	1522.7	716.5	
80 100	800	110	1000	210	2,384	A	10.0	17	13.35	2,438	14,878	427.8	670.3	523.8	
						B	10.0	34	26.69	2,491	15,205	589.2	1244.4	660.1	
						C	11.2	34	34.00	2,520	15,384	673.1	1522.7	716.5	
90 100	900	120	1000	170	2,941	A	10.0	20	15.70	3,003	23,382	597.6	893.3	641.7	
						B	10.0	40	31.40	3,066	23,872	822.3	1665.8	811.6	
						C	11.2	40	40.00	3,101	24,140	938.8	2045.9	883.0	
90 110	900	120	1100	220	2,941	A	10.0	20	15.70	3,003	23,382	589.2	893.3	641.7	
						B	10.0	40	31.40	3,066	23,872	822.3	1665.8	811.6	
						C	11.2	40	40.00	3,101	24,140	938.8	2045.9	883.0	
100 120	1000	130	1200	230	3,553	A	10.0	24	18.84	3,629	35,097	807.3	1194.0	778.8	
						B	10.0	48	37.68	3,704	35,827	1110.7	2230.4	981.7	
						C	11.2	48	48.00	3,745	36,226	1260.7	2741.4	1063.8	

マナック株式会社

本社／〒452-0005	愛知県清須市西枇杷島町恵比須17	TEL052-501-5351	FAX052-502-4329
東京支店／〒164-0001	東京都中野区中野51-1-5 シティコートTM	TEL03-5942-8528	FAX03-5942-8529
浜松支店／〒435-0028	静岡県浜松市中央区飯田町306	TEL053-463-4545	FAX053-463-1698
豊橋営業所／〒441-8052	愛知県豊橋市花田町野黒63-12	TEL0532-35-4245	FAX0532-33-4230
岐阜営業所／〒503-1331	岐阜県養老郡養老町橋爪新宮野575-1	TEL0584-34-1335	FAX0584-34-0124
大阪営業所／〒541-0056	大阪府大阪市中央区南船場1-12-3 ARCA心斎橋	TEL06-6263-0760	FAX06-6263-0763
静岡出張所／〒427-0008	静岡県静岡市駿河区稲川1丁目1番6号 フォレスト静岡駅前201号	TEL054-207-9251	FAX054-207-9252
浜松工場／〒431-3101	静岡県浜松市中央区豊田3257	TEL053-434-1073	FAX053-435-3338
養老工場／〒503-1331	岐阜県養老郡養老町橋爪新宮野575-1	TEL0584-34-1335	FAX0584-34-0124